


### DN 50–400 Standard construction

- Material acc. to data sheet 2.0.13
- Body and upper construction with epoxy powder coating
- Stainless steel parts without coating
- Flange drilling: PN 10/16 EN 1092 / ISO 7005
- Face-to-face: EN 558 / ISO 5752 part 20
- Nominal pressure PN: DN 50–200 10 bar  
DN 250–300 6 bar  
DN 350–400 4 bar
- Operating pressure: Refer to table column OP
- For dead-end installation we recommend using steel-enforced rubber gasket
- Test acc. EN 12266-1, rate A

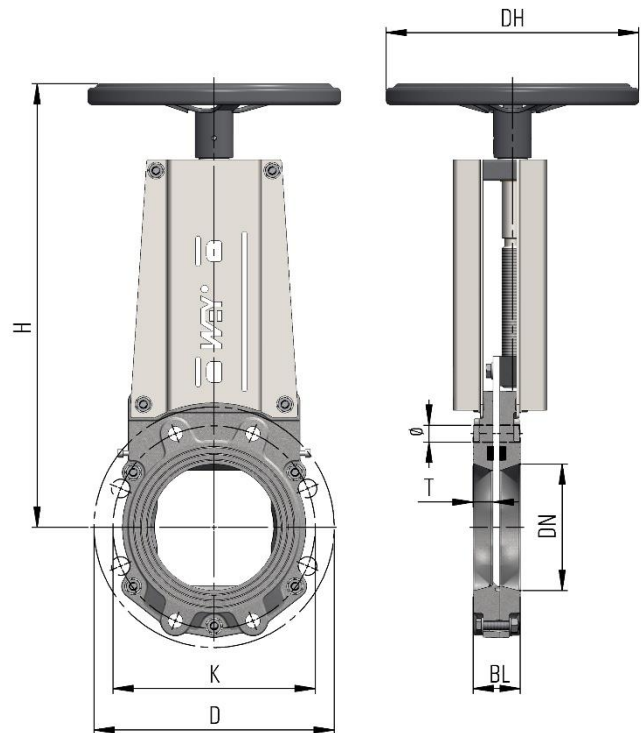

DN	D	K	BL	H	DH	Ø	T	Screws	⊕	⊕	OP max. bar	Weight
50	165	125	43	328	150	M16	–	4 pcs.	–	4	10	7 kg
65 <sup>1</sup>	185	145	46	340	150	M16	18	8 pcs.	4	4	10	8 kg
80	200	160	46	358	200	M16	17	8 pcs.	4	4	10	9 kg
100	220	180	52	411	200	M16	20	8 pcs.	4	4	10	12 kg
125	250	210	56	452	200	M16	22	8 pcs.	4	4	10	14 kg
150	285	240	56	526	300	M20	21	8 pcs.	4	4	10	22 kg
200	340	295	60	606	300	M20	23	8 pcs.	4	4	10	29 kg
250	395	350	68	696	300	M20	19	12 pcs.	6	6	6	40 kg
300	445	400	78	792	400	M20	23	12 pcs.	6	6	6	65 kg
350	505	460	78	905	400	M20	20	16 pcs.	8	8	4	89 kg
400	565	515	102	987	400	M24	28	16 pcs.	6	10	4	115 kg

<sup>1</sup> DN 65 with 8 holes