STOP LOG

For temporarily or variably blocking sewers, our range includes aluminum stop logs. We custom-make the installation frames for the logs with pressing devices from high-quality stainless steel. Our stop logs seal on 3 sides in both flow directions.

CHARACTERISTICS STOP LOG

Stop log

Design

500 – 6400 mm

Width

0.15 – 6 m

Head of water

APPLICATION AREAS

Flood protection

Infrastructure

e.g. Waste water, Rainwater, Industrial water, Mixed water ...

Waste water treatment plants

e.g. Waste water, Raw water ...

Water treatment

e.g. Seawater ...

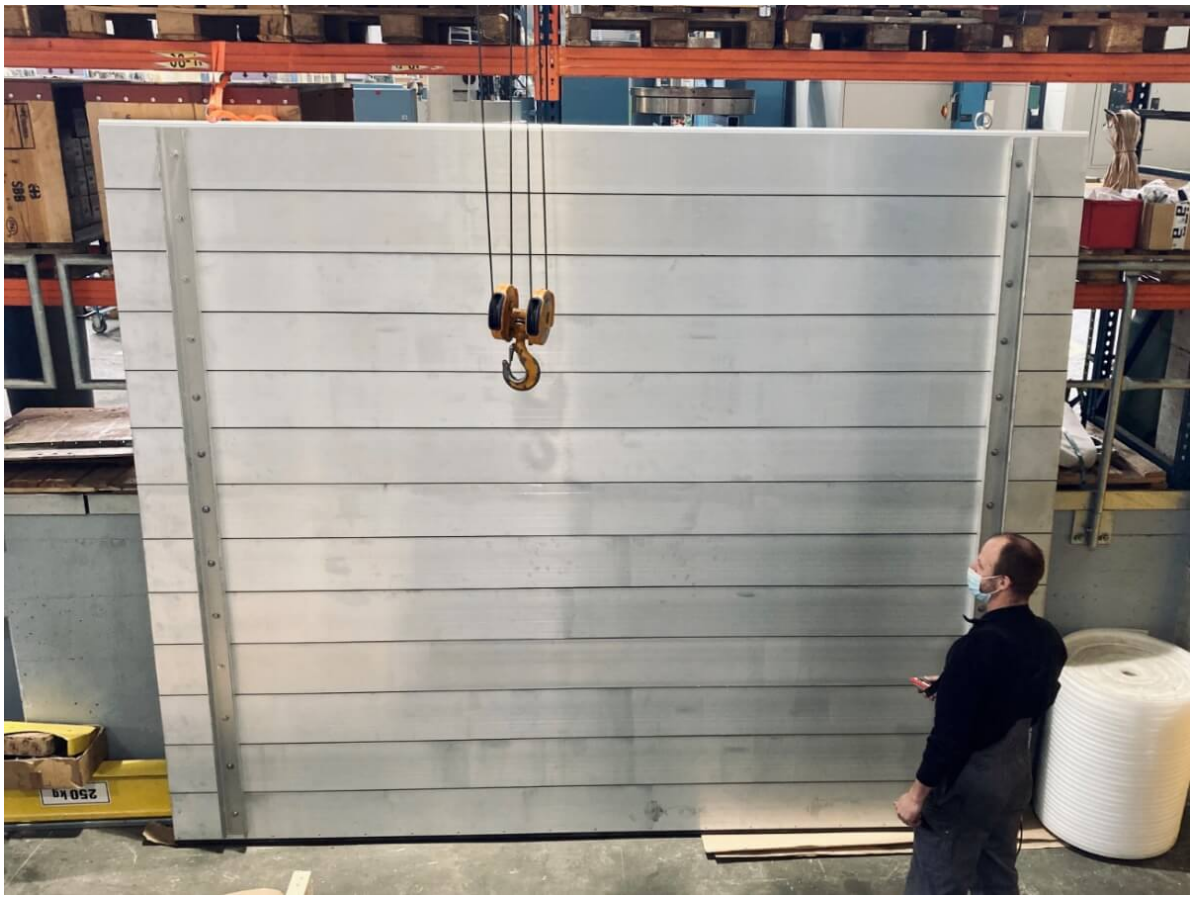

Wey stop log 6.6 with a width of 3.6m and a height of 3.0m in our production site in Switzerland.

MATERIAL OF CONSTRUCTION

Part	
Frame	1.4404
Stop log elements	Aluminium
Seal	NBR / PU

Other materials upon request

CONTACT US FOR YOUR TAILOR-MADE SOLUTION.

Contact +41 41 449 99 44 rfq@weyvalve.ch